

Ideal for plants, offices,
municipalities and parks

MASTER CART[™]
by **IPL**

95 US gal/360 L and 64 US gal/240 L WHEELED CART

Looking INTO unique features loaded with advantages




1 Advanced lid hinge design, reduces water seepage, helps prevent content to be blown away by the wind and keeps pests out. The lid closes effortlessly by its own weight. The domed shape sheds water. A molded-in rim barrier reduces risk of moisture seeping into the cart. Two (2) back handles are moulded with four (4) double-braced attachment hinges for extra strength (single-braced on the 64 US gal/240 L).

2 Ergonomic handles (4 on 95 US gal/360 L, 2 on 64 US gal/240 L) provide easy handling in tight spots or when the cart is against a wall. Even full, the cart can be moved effortlessly. For cleanliness and safety, handles allow the lid to be raised without touching its bottom edge.

3 12 inches (30 cm) heavy-duty quiet solid rubber wheels. Wider wheel base provides extra stability over uneven surfaces (like snow and gravel) and increase safety. Extended life of the wheel is ensured by the reinforced yoke hub assembly and an integrated spacer that dissipate stress from the wheels. The wheels snap on without tools and because of the lock-on system, they cannot be easily stolen like on other carts.

Rubber wheels will not crack on flat spot like hollow wheels.

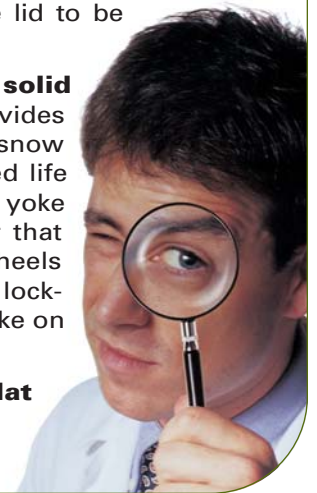

A LOAD OF ADDITIONAL PRODUCTIVE BENEFITS

LONG LIFE EXPECTANCY. UV stabilizer prevents deterioration from exposure to sunlight.

EASY TO ASSEMBLE. Minimal parts save time. Wheels snap on without tools.

EASY TO HANDLE. Designed with the user in mind, easy to open, easy to maneuver even when full.

STRONG AND DURABLE. Can take the worst weather and roughest handling; has 20-year life expectancy. Sturdiness is built into the cart from the start.

SAFE LID. Can support the weight of a child. Meets all ANSI standards.

FLEXIBLE. Suited for automated or semi-automated waste collection.

WIND RESISTANCE. Withstands over 55 mph (88 km/h) winds for an empty container. (Model # 60204)

ENVIRONMENT FRIENDLY. Keeps plastic garbage bags out of the landfill.

ECONOMICAL. Not using garbage bags saves up to \$50 a year.

MAKES COLLECTION EASIER. Universal system design (USD).



64 US gal/240 L
Model # 60213



95 US gal/360 L and 64 US gal/240 L WHEELED CART



KEY FEATURES

**Injection moulded cart for strength and durability
extra thick walls exceed all other manufacturers**

The IPL injection mould process produces exacting design and yields consistent thickness and precision.

- **7/8 in. solid steel axle**, zinc plated to prevent corrosion.
- **wheel security mount** to prevent theft – opening in hub for chain to secure the cart to a post or fence.
- **integrated reinforced plastic bar lift for integrity** – no metal bar holes, no leaks, no breakage. (Optional steel bar available).
- **dual moulded 5/16 in. wear ridge** on bottom of container to prevent wear-through.
- **unibody design requires no bolts that could potentially leak** – no holes at bottom of cart.
- meets all ANSI standards.
- made of high-density polyethylene (HDPE).

TECHNICAL DATA

Specifications (American style)		95 US gal	360 L	64 US gal	240 L
Model #		60204		60213	
Cart & Lid		Injection-molded process			
Sizes	Length	33 3/4 in.	85.7 cm	29 7/16 in.	74.4 cm
	Width	26 1/4 in.	66.7 cm	24 1/4 in.	59.1 cm
	Height	46 1/4 in.	117.5 cm	42 in.	106.6 cm
Wall thickness (avg.)		0.183 in.	0.46 cm	0.175 in.	0.44 cm
Wheel diameter	Standard wheel	12 in.	30 cm	12 in.	30 cm
	Optional wheel	-	-	8 in.	20 cm
Number of bags		6		4	
Weight w/standard wheel (approx.)		49.4 lb.	22.4 kg	38.9 lb.	17.65 kg
Weight w/optional wheel (approx.)		-	-	33.4 lb.	15.2 kg
Axle, zinc plated steel (7/8 in.)		22.7 in.	57.6 cm	21.8 in.	55.4 cm
Rubber wheel		Yes		Yes	
Bottom wear strips (5/16 in.)		Yes		Yes	
Wind resistance		55 mph	88 km/h	61 mph	98 km/h
Lid		Single (standard) Optional paper slot/deflector with lock			
Collection system		Manual or semi/full automated system (recommended)			
Dimensions may vary +/- 2%					

COLORS (STANDARD)



Other colors available on request.

Colors as shown in the document may differ slightly from the actual products.

THERMAL RESISTANCE

From -40°C (-40°F) to 39°C (102°F)

SOLUTIONS available to meet your needs



- **Organic collection**



- **Dual recycling collection**



- **Paper slot/deflector with lock**



- **Glass/can opening**



- **Steel bar**



Financing and leasing programs available

- **Customized hot-stamping/personalization**
Professional look. Identifies property. Can communicate a message.
- **Labels and decals**
Advertise/personalize. Durable vinyl. IPL sourced, easy to order.

MASTER CART™

SPECIALIZED SOLUTIONS FOR SPECIFIC NEEDS



ISO 9001 certification ensures consistent high quality



Better products in plastic

IPL Waste Handling
Tel.: 1 800 463-4755 • (418) 789-2880
Fax: (418) 789-3388 • www.ipl-plastics.com

Specifications may change without notice.